

# Trilogy: DL3200

 hospitals  schools  airports  retail  pharmacies  offices

## Trilogy T3: choice of audit trail pushbutton locks

### T3 advanced digital lock with audit trail; high capacity audit trail lock




- **Rugged clutch mechanism and Grade 1 durability** ensure long life
- **150 scheduled lock/unlock events**, including 4 "quick schedules" for programming the 4 most common time schedules in one step
- **2000 user codes** including: Master, manager, supervisor and basic user. One code (3-6 digits)
- **Weatherproof performance**, operational temperature range of -31°F to +151°F (-35°C to +66°C)
- **Entry allowance** from 5-15 seconds
- **Greater security with "temporary keypad lockout" after 3 unsuccessful code-entry attempts**
- **Up to 40,000 event audit trail with time/date stamp** for a printable record of door access activity by user
- **Real time clock** allows logging of events to within 1 second of accuracy
- **Programmable relays** energize when one or more selected events occur
- **4 time-out functions** allow a user to enable other users or unlock the lock for some time period without needing to return to the lock
- **Easy to install in about an hour** retrofits most cylindrical locksets and digital locks
- **Battery operated**; uses 5AA batteries; 80,000 cycles, typical.
- **Available in standard key override and interchangeable core models** accepting 6 or 7 pin cores from Arrow, Best, Falcon or KSP. Other IC core preps available.
- **Available in standard Trilogy leverset (straight) or with Regal (curved) lever**
- **Available in five finishes**; polished brass (US3), antique brass (US5), polished chrome (US26), satin chrome (US26D), duronodic (US 10B).
- **Quick Passage Mode**; (without being in program mode)

### DL3000

- **Original audit trail Trilogy**, similar to DL3200 series but with 300 multilevel user codes; 1600 event log



**ALARM LOCK**

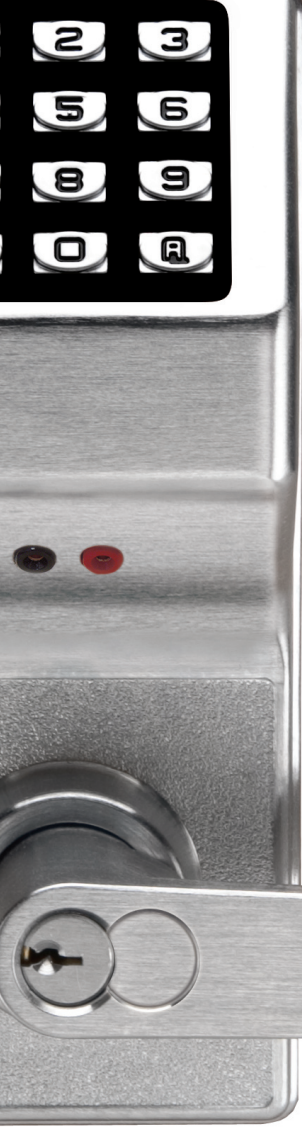

**KEYPAD:** All metal, 12-button programmable for multi-level access functions including group or individual user codes, master, and management codes, passage and emergency or service code, lockout and remote override capability and allowable entry time from 5 to 15 seconds.

**OPERATION:** Clutch mechanism permits turning lever without retracting latch and reduces stress on lock bodies and spindle. Outside lever free turning in locked position. Entering access code, key bypass, or remote bypass will allow level to retract latch. Inside level always instant egress.

**DOOR THICKNESS:** 1 5/8" to 1 7/8" standard. For other other thicknesses, please consult factory.

**BACKSET:** 2 3/4" Standard. 2 3/8" backset also available.

**AUDIT TRAIL:** Entry activity log can be polled to the Dara Transfer Module (AL-DTM), any PC using DL-Windows Software, and/or can be on-site printed using the hands-held infrared printer (AL-IR1). Activities included are: unlock/lock events, program mode changes, user entry, keypad lockout, remote release events, unauthorized code attempts, etc.

**STRIKE:** 1 1/8" x 2 3/4" T strike standard. With screws for wood or metal jambs. 1 1/4" x 4 7/8". ASA strike also included.


**FINISHES:** US3 polished brass, US26D satin chrome, US26 polished chrome, US5 antique brass, plus special order finishes (including Duronidic US10B).

**DOOR PREP:** Standard ANSI A115 Series Prep, modified by adding additional through-bolt holes.

**COMPLIANCES:** Grade I, heavy duty cylindrical lockset, UL listed to the 10C Positive Pressure Specification and FCC certified. ADA compliant levers.



**STANDARD KEY OVERRIDE CYLINDER:** Solid brass 6 pin tumbler cylinder pinned 5, SCI keyway, furnished in all locks. Additional tailpieces included: HW580 fits Schlage, Corbin/Ruswin CL, Sargent 480 Series, ASSA65-611, Model HW620 fits Ilco and Lori cylinders.

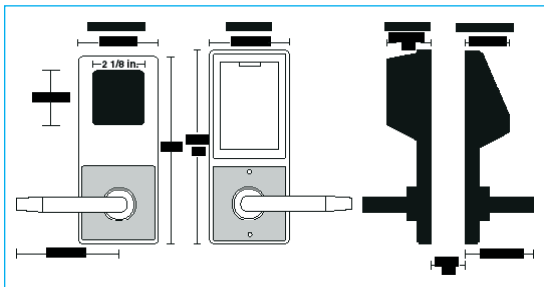

**DL 30 00 WP IC /26D -Y**

**Model & Series:**

DL30 = Trilogy T3 Series

**Trim:**

00 = Straight Lever

75 = Regal Lever

**Exterior/Interior Use:**

WP = Weatherproof for exterior use

(Note: No "WP" indicates standard, interior use.)

**Cylinder:**

IC = Standard Interchangeable Core Prep for Best, Falcon, Arrow, KSP

(Note: No "IC" indicates standard K.O. cylinder.)

**Finish:**

/3 = US3 Polished Brass

/26 = US26 Polished Chrome

/26D = US26D Satin Chrome

/5 = US5 Antique Brass

/10B = Duronidic (Special Order)

**Special Order IC Prep:**

-Y = Yale

-M = Medeco

-R = Sargent

-C = Corbin/Ruswin

-S = Schlage

**INTERCHANGEABLE CODE**

**MODELS:** Accepts 6 & 7 Pin Cylinders from: Best, Arrow, KSP, Falcon and Kaba Peaks. Also available IC Core models for Yale, Medeco, Corbin/Ruswin, Sargent and Schlage. *Alarm Lock tailpieces is supplied; IC Core is not included.*

**POWER:** 5AA alkaline batteries, supplied. Audible low battery alert, visual and audible entry indicators, unique Flex Drive motor. 100,000 cycles typical.


**HANDLING:** Non handled

**LATCHBOLT:** UL Listed, fire rated, 3 hours, 1/2" throw, solid brass, deadlocking. Reversible. Adjustable front for flat or beveled doors.

**LATCH FRONT:** 1 1/8" x 2 1/4" wrought brass or stainless steel.



Regal handle option



Lever sets feature clutch mechanism ensuring longer life and complies with ADA specs providing barrier-free access to the disabled.

Trilogy audit trail lock accessories

**AL-DTMII Data Transfer Module** used to transfer program data from the PC (running DL-WINDOWS software) to the lock and receives audit trail from the lock. Can store data for up to 96 locks at a time.

**AL-PCI2 Trilogy PC Software Kit** Windows-format software kit used to program Trilogy

lock, codes, schedules, view audit trail reports. Kit includes DL-WINDOWS software and (required) computer interface cable for use on serial port. Note: Requires DL-WINDOWS Software version 3.02 or higher.

**AL-PCI2-USB**, As above, but with interface cable for USB port.

**DL-WINDOWS** Upgrade for Trilogy software version (software only). (Contained in two items above.)

**AL-PRE: Prox Card Reader/Enroller** Enables instant, automatic enrollment of Prox cards, keyfobs, tags into DL-Windows (Simply present the prox Card/fob device to the unit's faceplate to enroll—no need to be in the presence of the lock while enrolling—eliminates the need for keyboarding each badge's number). Supports all Prox cards, keyfobs and tags. Simultaneous card enrollment, downloading or uploading – all on just one serial port. 9V Battery operation.

**AL-IR1 Infrared Printer** Prints the event log and user code with wireless hand-held convenience (battery operated).



**ALARM LOCK**

345 Bayview Ave, Amityville, New York 11701  
1-800-ALA-LOCK • Fax 631-789-3383  
www.alarmlock.com

Trilogy is a trademark of Alarm Lock. © NAPCO 6/2005  
Patents and Patents Pending ALA167a

